



# Synthalat QWK 3517

water-based acrylic-modified alkyd resin

**Synthalat QWK 3517 is ideal for industrial applications such as aqueous primers and single-coat paints.**

## FIELD OF APPLICATION

Synthalat QWK 3517 can be used for various aqueous Industrial applications. From a primer to single coat paint (DTM) and top coat or stoving enamel, our product can be used for matt to high-gloss paints. The universal adhesion on various substrates (steel, aluminum, zinc) can be emphasised as well as the co-free drying with very good early water resistance. Furthermore, the weather resistance tests were extremely positive.


## HIGHLIGHTS

- versatilyly applicable
- very good weather resistance
- both matt and high-gloss coatings
- universal adhesion
- very good early water resistance



## PROPERTIES AND TECHNICAL DATA

Oil-length	Short-oil
Viscosity/ 23°C	100 – 900 mPas
NVC	45 +/-1 %
pH-value (10% dilution in water)	7.8 – 8.8

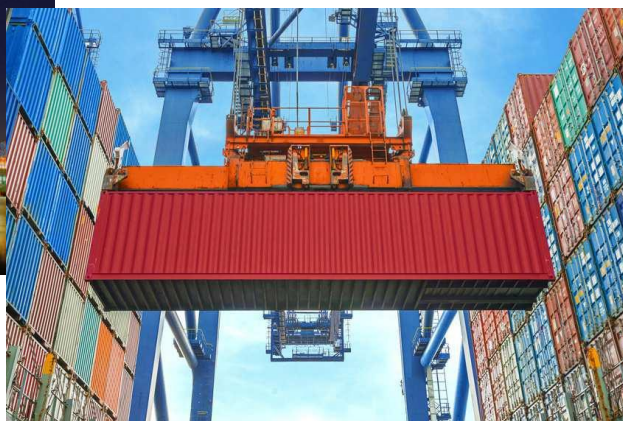

### SAMPLING

Ordering samples of Synthalat QWK 3517 can be done easily by contacting Cathay Industries Australasia

### CONTACT



If you are interested in more information about our products (Guide Formulations, Datasheets), please contact your Cathay Industries Territory Manager:

[www.cathayindustries.com.au](http://www.cathayindustries.com.au)